


# 6000-Watt Diesel

A diesel generator from Mi-T-M is built with the highest quality generator components possible including the powerful Kohler engine. Known for their long life span, diesel generators typically have lower operating costs and run nearly smoke free.

Limited Warranties:

**2 Year** Alternator      **3 Year** Kohler Engine

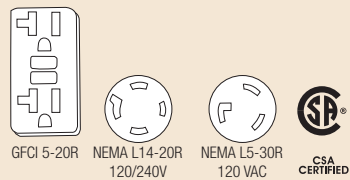

**Alternator**

- ✓ Total harmonic distortion (THD) less than 5%
- ✓ 100% copper windings

**Frame**

- ✓ Heavy-duty wraparound frame with 1-inch steel tubing
- ✓ Angled isolator design features six neoprene isolators

**Components**

- ✓ Easy-access and protected control panel with magnetic circuit breakers and GFCI-protected receptacles
- ✓ Fuel shut-off valve
- ✓ Easy-to-read fuel gauge
- ✓ Voltmeter/hour meter
- ✓ Heavy-duty industrial air cleaners

To see more online, scan here or go to [www.mitm.com](http://www.mitm.com):



<b>MODEL NUMBER</b>	GEN-6000-0MKD
<b>MAX. AC OUTPUT</b>	6000 watts
<b>RATED AC OUTPUT</b>	5000 watts
<b>HORSEPOWER/ENGINE</b>	9.8 HP Kohler with electric start (battery included)
<b>ALTERNATOR</b>	Brushless 120V/240V, 60Hz
<b>MAX. AMPS (120V/240V)</b>	50.0/25.0
<b>CONT. AMPS (120V/240V)</b>	41.7/20.8
<b>RECEPTACLES</b>	(2) 120V, 20A GFCI duplex (1) 120V/240V, 20A twist lock (1) 120V, 30A twist lock
<b>CIRCUIT BREAKERS</b>	(1) Main circuit breaker (2) 20A toggle circuit breakers, single pole (1) 20A toggle circuit breakers, double pole (1) 30A toggle circuit breaker, single pole
<b>RATED SPEED</b>	3600 RPM
<b>DECIBEL RATING</b>	85.0
<b>FUEL CAPACITY</b>	2.6 gallons
<b>RUN TIME (AT FULL LOAD)</b>	6.8 hours
<b>DIMENSIONS (LxWxH)</b>	29x21.62x22.5in.
<b>SHIP WT.</b>	295 lb.
<b>NET WT.</b>	273 lb.

Noise level tested at seven meters (75% load). Rating represents minimum noise level rating.



GEN-6000-0MKD

**Accessories:**

PART NUMBER	DESCRIPTION	FITS MODEL	PART NUMBER	DESCRIPTION	FITS MODEL
32-0915	RV generator adapter	GEN-6000-0MKD	AW-5740-0006	Wheel kit	GEN-6000-0MKD
AW-5090-0007	Lifting hook	GEN-6000-0MKD	AW-6000-1002	Equipment cover	GEN-6000-0MKD